

# NAB ATV/UTV Safety Requirement (1 of 2):

.....

## ❑ **Effective Immediately** – all ATV/UTV maximum speed shall be operator limited to:

- Above Ground -- Limited to 20 mph in the U.S.  and 35 km/h in Canada 
- Below Ground -- No change – as per Site specified max speed



## ❑ **Future NAB guidance** –

- Plan is to require all ATV/UTV vehicles to be **governed** at maximum speed
- Above Ground – governed limit of 20 mph in the U.S. and 35 km/h in Canada
- Below Ground – No changes to speed limit. Governed limit of 20 mph in the U.S. and 35 km/h in Canada.
- Procurement requirement details will be included


Effective 15 February 2023 until further notice



# NAB Aerial Lift Safety Requirement (2 of 2):

❑ **Begin Implementation Immediately** – all workers travelling in an aerial lift shall be restrained with a 4 Foot / 1.2 Meter fixed length Safety Restraint to prevent ejection from the basket in case of incident

- The fixed length of 4 ft / 1.2-meter is only needed when the aerial lift is travelling from place to place
- For more mobility in the basket, occupants may switch from the 4 ft / 1.2-meter Safety Restraint to other approved lanyard once the aerial lift is parked at the work location.
- 4 ft / 1.2-meter Safety Restraints are in stock and available for use
- Example - Potash part number: M1953838
- Example - Phosphate part number: **MOTION** in process of supplying to Phos sites

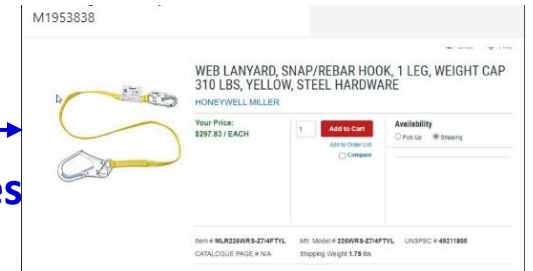

Effective 15 February 2023 until further notice

❑ **Future NAB guidance** –

- This requirement will be incorporated into a future NAB Program